

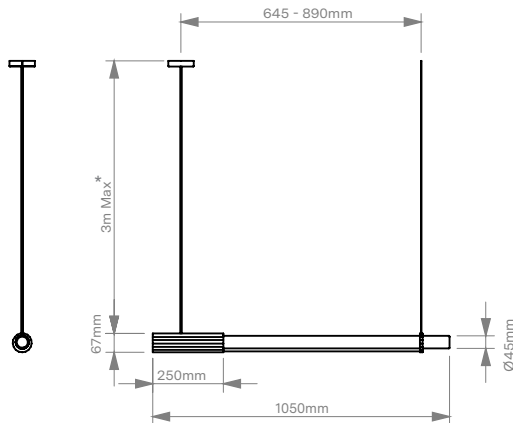


IN FINE 1050 PENDANT HORIZONTAL

Gaëlle Lauriot-Prévost & Dominique Perrault



Finition Corps Body Finishing



Silver
SIL
*BLACK
CABLE

Dark Grey
DG
*BLACK
CABLE

White
WH
*WHITE
CABLE

Red
RED
*BLACK
CABLE

Finition Verre Glass Finishing



Opal
OPAL

DCW Refs DCW Refs

IN FINE 1050 PH 2700K SIL	3700677667670
IN FINE 1050 PH 2700K DG	3700677667687
IN FINE 1050 PH 2700K WH	3700677667694
IN FINE 1050 PH 2700K RED	3700677667700
CASAMBI CBU-TED CONTROLLER	3700677662293
TRIAC TO DALI CONVERTER	3700677662866
COVER PLATE D85 WHITE	3700677667625
PART AC 1 WH	3700677668127
PART AC 1 DG	3700677668578
PART AC 1 RED	3700677668561
PART AC 2 500 WH	3700677668080
PART AC 2 500 DG	3700677668523
PART AC 2 500 RED	3700677668516
PART AC 2 1000 WH	3700677668097
PART AC 2 1000 DG	3700677668547
PART AC 2 1000 RED	3700677668530

Typologie Typology

Tension Voltage

Indice de protection Protection index

Classe Class

Puissance Power

Source Lumineuse Light Source

Température de couleur Color Temperature

Flux Lumineux Light Flux

Driver Light Flux

Gradation Dimming

Interrupteur Switch

Matériaux Materials

Poids Net Net Weight

Poids Brut Gross Weight

Emballage Packaging

Marquages Marks

EPREL EPREL

Options Options

Suspension Pendant lamp

220-240V

IP65

2

15W

LED intégrée - remplaçable
Integrated LED - replaceable

2700K

1500lm (valeur nominale)
1500lm (nominal value)

Intégré - CC - 350mA - 82×30×20mm
Integrated - CC - 350mA - 82×30×20mm

Oui, TRIAC
Yes, TRIAC

Non
No

Aluminium, verre
Aluminum, glass

2,1kg
4,6lbs

3,5kg
7.7lbs

235×130×135mm
(9.3×5.1×53.3in)




2589113

CASAMBI via contrôleur
CASAMBI with controller

DALI via convertisseur
DALI with converter


Plaque d'ornement
Cover plate

Accessoire de pontage pour point électrique
déporté
Bridging accessory for remote electrical point

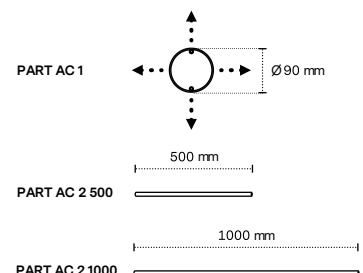


IN FINE 1600 PENDANT HORIZONTAL

Gaëlle Lauriot-Prévost & Dominique Perrault

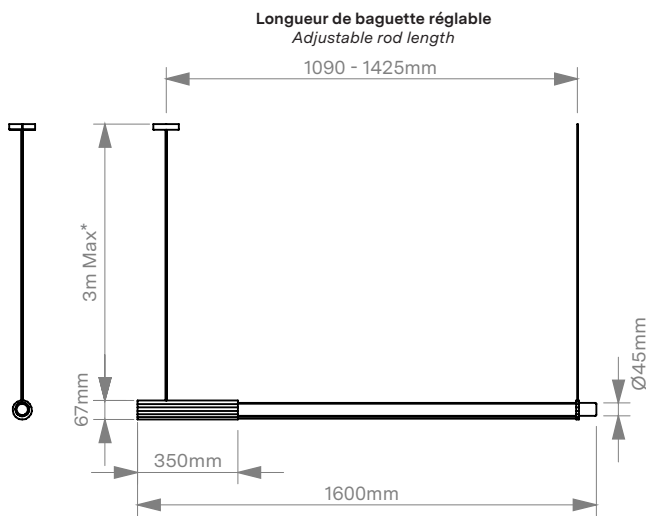

Finition Corps Body Finishing



Silver
SIL
*BLACK
CABLE

Dark Grey
DG
*BLACK
CABLE

White
WH
*WHITE
CABLE

Red
RED
*BLACK
CABLE

Finition Verre Glass Finishing



Opal
OPAL

DCW Refs DCW Refs

IN FINE 1600 PH 2700K SIL	3700677667632
IN FINE 1600 PH 2700K DG	3700677667649
IN FINE 1600 PH 2700K WH	3700677667656
IN FINE 1600 PH 2700K RED	3700677667663
CASAMBI CBU-TED CONTROLLER	3700677662293
TRIAC TO DALI CONVERTER	3700677662866
COVER PLATE D85 WHITE	3700677667625
PART AC 1 WH	3700677668127
PART AC 1 DG	3700677668578
PART AC 1 RED	3700677668561
PART AC 2 500 WH	3700677668080
PART AC 2 500 DG	3700677668523
PART AC 2 500 RED	3700677668516
PART AC 2 1000 WH	3700677668097
PART AC 2 1000 DG	3700677668547
PART AC 2 1000 RED	3700677668530

Typologie Typology

Tension
Voltage

Indice de protection
Protection index

Classe
Class

Puissance
Power

Source Lumineuse
Light Source

Température de couleur
Color Temperature

Flux Lumineux
Light Flux

Driver
Light Flux

Gradation
Dimming

Interrupteur
Switch

Matériaux
Materials

Poids Net
Net Weight

Poids Brut
Gross Weight

Emballage
Packaging

Marquages
Marks

EPREL
EPREL

Options
Options

Suspension
Pendant lamp

220-240V

IP44

2

30W

LED intégrée - remplaçable
Integrated LED - replaceable

2700K

3000lm (valeur nominale)
3000lm (nominal value)

Intégré - CV - 12V - 260×30×18,5mm
Integrated - CV - 12V - 260×30×18,5mm

Oui, TRIAC
Yes, TRIAC

Non
No

Aluminium, verre
Aluminum, glass

2,8kg
6,2lbs

4,2kg
9.2lbs

235×130×1905mm
(9.2×5.1×75in)



2589114

CASAMBI via contrôleur
CASAMBI with controller

DALI via convertisseur
DALI with converter

Plaque d'ornement
Cover plate

Accessoire de pontage pour point électrique
déporté
Bridging accessory for remote electrical point

